




AQ8025 SERIES

External Dimensions

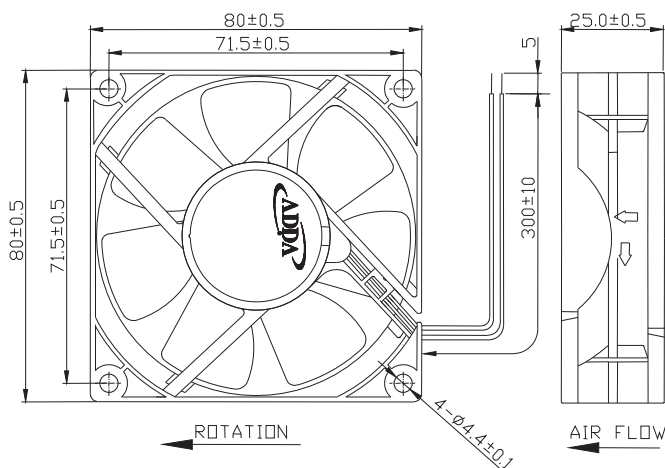

Frame:Plastic(UL:94V-0)
Impeller:Plastic(UL:94V-0)
Lead wire:UL1007AWG24


Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ⚙=Sleeve ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)		*Noise Level (dB/A)	Weight (g)
80x80x25	AQ0812LB-A70GL(T)	◎	12	0.08	0.96	2100	0.764	27.019	0.072	1.828	22.3	86.0
	AQ0812MB-A70GL(T)	◎	12	0.12	1.44	2500	0.916	32.384	0.102	2.590	29.4	
	AQ0824LB-A70GL(T)	◎	24	0.04	0.96	2100	0.764	27.019	0.072	1.828	22.3	
	AQ0824MB-A70GL(T)	◎	24	0.07	1.68	2500	0.916	32.384	0.102	2.590	29.4	

Specifications subject to change without notice.

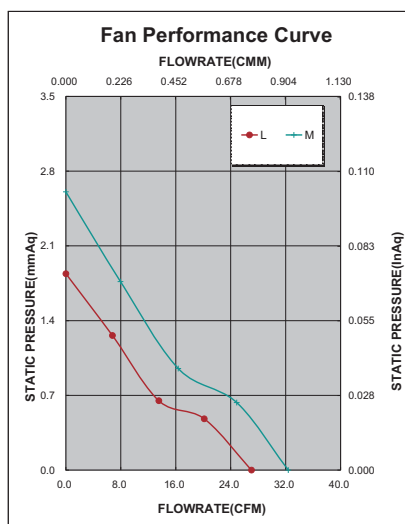

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

✓	✓		✓	✓